


Circlip for bore hole, standard version, shape J DIN 472 for bore holes, spring steel, phosphated and oiled

Standards	DIN 472
Material	Spring steel
Surface	Phosphated
Design	Standard design
Form	J
RoHS-compliant	Yes



Illustration only

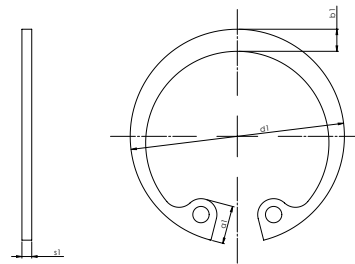

Suitable for holes	Suitable for groove diameter	Outer diameter (d ₁)	Eye width (a ₁)	Width (b ₁)	Thickness (s ₁)	Art. no.	P. Qty.
8 mm	8.4 mm	8.7 mm	2.4 mm	1.1 mm	0.8 mm	0439 8	100/2500
9 mm	9.4 mm	9.8 mm	2.5 mm	1.3 mm	0.8 mm	0439 9	100/1000
10 mm	10.4 mm	10.8 mm	3.2 mm	1.4 mm	1 mm	0439 10	100/3000
11 mm	11.4 mm	11.8 mm	3.3 mm	1.5 mm	1 mm	0439 11	100/1000
12 mm	12.5 mm	13 mm	3.4 mm	1.7 mm	1 mm	0439 12	100/1000
13 mm	13.6 mm	14.1 mm	3.6 mm	1.8 mm	1 mm	0439 13	100/1000
14 mm	14.6 mm	15.1 mm	3.7 mm	1.8 mm	1 mm	0439 14	100/1000
15 mm	15.7 mm	16.2 mm	3.7 mm	2 mm	1 mm	0439 15	100/1000
16 mm	16.8 mm	17.3 mm	3.8 mm	2 mm	1 mm	0439 16	100/1000
17 mm	17.8 mm	18.3 mm	3.9 mm	2.1 mm	1 mm	0439 17	100
18 mm	19 mm	19.5 mm	4.1 mm	2.2 mm	1 mm	0439 18	100/1000
19 mm	20 mm	20.5 mm	4.1 mm	2.2 mm	1 mm	0439 19	100/1000
20 mm	21 mm	21.5 mm	4.1 mm	2.3 mm	1 mm	0439 20	100/1000
21 mm	22 mm	22.5 mm	4.2 mm	2.4 mm	1 mm	0439 21	25
22 mm	23 mm	23.5 mm	4.2 mm	2.5 mm	1 mm	0439 22	25/100/ 1000
23 mm	24.1 mm	24.6 mm	4.2 mm	2.5 mm	1.2 mm	0439 23	25/1000
24 mm	25.2 mm	25.9 mm	4.3 mm	2.6 mm	1.2 mm	0439 24	25/100/ 500
25 mm	26.2 mm	26.9 mm	4.5 mm	2.7 mm	1.2 mm	0439 25	100/1000
26 mm	27.2 mm	27.9 mm	4.7 mm	2.8 mm	1.2 mm	0439 26	25/100/ 500



Suitable for holes	Suitable for groove diameter	Outer diameter (d ₁)	Eye width (a ₁)	Width (b ₁)	Thickness (s ₁)	Art. no.	P. Qty.
27 mm	28.4 mm	29.1 mm	4.7 mm	2.9 mm	1.2 mm	0439 27	25/500
28 mm	29.4 mm	30.1 mm	4.8 mm	2.9 mm	1.2 mm	0439 28	25/100
29 mm	30.4 mm	31.1 mm	4.8 mm	3 mm	1.2 mm	0439 29	25/1000
30 mm	31.4 mm	32.1 mm	4.8 mm	3 mm	1.2 mm	0439 30	25/100/ 1000
31 mm	32.7 mm	33.4 mm	5.2 mm	3.1 mm	1.2 mm	0439 31	25/500
32 mm	33.7 mm	34.4 mm	5.4 mm	3.2 mm	1.2 mm	0439 32	25/100/ 500
33 mm	34.7 mm	35.5 mm	5.4 mm	3.3 mm	1.2 mm	0439 33	25
34 mm	35.7 mm	36.5 mm	5.4 mm	3.3 mm	1.5 mm	0439 34	25/100
35 mm	37 mm	37.8 mm	5.4 mm	3.4 mm	1.5 mm	0439 35	25/100
36 mm	38 mm	38.8 mm	5.4 mm	3.5 mm	1.5 mm	0439 36	25/100
37 mm	39 mm	39.8 mm	5.5 mm	3.6 mm	1.5 mm	0439 37	25/100
38 mm	40 mm	40.8 mm	5.5 mm	3.7 mm	1.5 mm	0439 38	25/100
39 mm	41 mm	42 mm	5.6 mm	3.8 mm	1.5 mm	0439 39	25
40 mm	42.5 mm	43.5 mm	5.8 mm	3.9 mm	1.75 mm	0439 40	25/50/ 100
41 mm	43.5 mm	44.5 mm	5.9 mm	4 mm	1.75 mm	0439 41	25/100
42 mm	44.5 mm	45.5 mm	5.9 mm	4.1 mm	1.75 mm	0439 42	25/50/ 100
43 mm	45.5 mm	46.5 mm	5.9 mm	4.2 mm	1.75 mm	0439 43	100
44 mm	46.5 mm	47.5 mm	6 mm	4.2 mm	1.75 mm	0439 44	25
45 mm	47.5 mm	48.5 mm	6.2 mm	4.3 mm	1.75 mm	0439 45	25/100
46 mm	48.5 mm	49.5 mm	6.3 mm	4.4 mm	1.75 mm	0439 46	25/200
47 mm	49.5 mm	50.5 mm	6.4 mm	4.4 mm	1.75 mm	0439 47	25/50/ 100
48 mm	50.5 mm	51.5 mm	6.4 mm	4.5 mm	1.75 mm	0439 48	25/100
50 mm	53 mm	54.2 mm	6.5 mm	4.6 mm	2 mm	0439 50	10/50/ 100
51 mm	54 mm	55.2 mm	6.5 mm	4.7 mm	2 mm	0439 51	10
52 mm	55 mm	56.2 mm	6.7 mm	4.7 mm	2 mm	0439 52	10/50/ 100
53 mm	56 mm	57.2 mm	6.7 mm	4.9 mm	2 mm	0439 53	100
54 mm	57 mm	58.2 mm	6.7 mm	5 mm	2 mm	0439 54	10/100
55 mm	58 mm	59.2 mm	6.8 mm	5 mm	2 mm	0439 55	10/50/ 100
56 mm	59 mm	60.2 mm	6.8 mm	5.1 mm	2 mm	0439 56	10/100
57 mm	60 mm	61.2 mm	6.8 mm	5.1 mm	2 mm	0439 57	10/100
58 mm	61 mm	62.2 mm	6.9 mm	5.2 mm	2 mm	0439 58	10/100
60 mm	63 mm	64.2 mm	7.3 mm	5.4 mm	2 mm	0439 60	10/100
62 mm	65 mm	66.2 mm	7.3 mm	5.5 mm	2 mm	0439 62	10/50/ 100
63 mm	66 mm	67.2 mm	7.3 mm	5.6 mm	2 mm	0439 63	10
64 mm	67 mm	68.2 mm	7.4 mm	5.7 mm	2 mm	0439 64	100
65 mm	68 mm	69.2 mm	7.6 mm	5.8 mm	2.5 mm	0439 65	10/50
67 mm	70 mm	71.5 mm	7.7 mm	6 mm	2.5 mm	0439 67	10
68 mm	71 mm	72.5 mm	7.8 mm	6.1 mm	2.5 mm	0439 68	10/50
70 mm	73 mm	74.5 mm	7.8 mm	6.2 mm	2.5 mm	0439 70	10/100
72 mm	75 mm	76.5 mm	7.8 mm	6.4 mm	2.5 mm	0439 72	10/50
72 mm	75 mm	76.5 mm	9.2 mm	6.4 mm	2 mm	0439 72 2	100
75 mm	78 mm	79.5 mm	7.8 mm	6.6 mm	2.5 mm	0439 75	10/50
78 mm	81 mm	82.5 mm	8.5 mm	6.8 mm	2.5 mm	0439 78	100
80 mm	83.5 mm	85.5 mm	8.5 mm	7 mm	2.5 mm	0439 80	10/50
82 mm	85.5 mm	87.5 mm	8.5 mm	7 mm	2.5 mm	0439 82	10/100

Suitable for holes	Suitable for groove diameter	Outer diameter (d ₁)	Eye width (a ₁)	Width (b ₁)	Thickness (s ₁)	Art. no.	P. Qty.
85 mm	88.5 mm	90.5 mm	8.6 mm	7.2 mm	3 mm	0439 85	10/50
88 mm	91.5 mm	93.5 mm	8.6 mm	7.4 mm	3 mm	0439 88	50
90 mm	93.5 mm	95.5 mm	8.6 mm	7.6 mm	3 mm	0439 90	10/50
92 mm	95.5 mm	97.5 mm	8.7 mm	7.8 mm	3 mm	0439 92	50
95 mm	98.5 mm	100.5 mm	8.8 mm	8.1 mm	3 mm	0439 95	10/50
97 mm	100.5 mm	103.5 mm	9 mm	8.3 mm	3 mm	0439 97	50
98 mm	101.5 mm	103.5 mm	9 mm	8.3 mm	3 mm	0439 98	50
100 mm	103.5 mm	105.5 mm	9.2 mm	8.4 mm	3 mm	0439 100	10/50
102 mm	106 mm	108 mm	9.5 mm	8.5 mm	4 mm	0439 102	25
105 mm	109 mm	112 mm	9.5 mm	8.7 mm	4 mm	0439 105	25
107 mm	111 mm	115 mm	9.5 mm	8.9 mm	4 mm	0439 107	25
108 mm	112 mm	115 mm	9.5 mm	8.9 mm	4 mm	0439 108	25
110 mm	114 mm	117 mm	10.4 mm	9 mm	4 mm	0439 110	10/25
112 mm	116 mm	119 mm	10.5 mm	9.1 mm	4 mm	0439 112	25
115 mm	119 mm	122 mm	10.5 mm	9.3 mm	4 mm	0439 115	25
117 mm	121 mm	125 mm	10.7 mm	9.6 mm	4 mm	0439 117	40
118 mm	122 mm	122 mm	10.7 mm	9.6 mm	4 mm	0439 118	25
120 mm	124 mm	127 mm	11 mm	9.7 mm	4 mm	0439 120	25
122 mm	126 mm	129 mm	11 mm	9.8 mm	4 mm	0439 122	25
125 mm	129 mm	132 mm	11 mm	9.8 mm	4 mm	0439 125	25
127 mm	131 mm	132 mm	11 mm	10 mm	4 mm	0439 127	25
128 mm	132 mm	135 mm	11 mm	10.2 mm	4 mm	0439 128	25
130 mm	134 mm	137 mm	11 mm	10.2 mm	4 mm	0439 130	25
135 mm	139 mm	142 mm	11.2 mm	10.5 mm	4 mm	0439 135	25
137 mm	141 mm	145 mm	11.2 mm	10.6 mm	4 mm	0439 137	25
138 mm	142 mm	145 mm	11.2 mm	10.6 mm	4 mm	0439 138	25
140 mm	144 mm	147 mm	11.2 mm	10.7 mm	4 mm	0439 140	25
142 mm	146 mm	149 mm	11.3 mm	10.8 mm	4 mm	0439 142	25
145 mm	149 mm	152 mm	11.4 mm	10.9 mm	4 mm	0439 145	25
148 mm	152 mm	155 mm	11.8 mm	11.1 mm	4 mm	0439 148	25
150 mm	155 mm	158 mm	12 mm	11.2 mm	4 mm	0439 150	25
152 mm	157 mm	161 mm	12 mm	11.3 mm	4 mm	0439 152	25
155 mm	160 mm	164 mm	12 mm	11.4 mm	4 mm	0439 155	40
160 mm	165 mm	169 mm	13 mm	11.6 mm	4 mm	0439 160	40
165 mm	170 mm	174.5 mm	13 mm	11.8 mm	4 mm	0439 165	25
167 mm	172 mm	177.5 mm	13.5 mm	12.1 mm	4 mm	0439 167	1
168 mm	173 mm	177.5 mm	13.5 mm	12.1 mm	4 mm	0439 168	25
170 mm	175 mm	179.5 mm	13.5 mm	12.2 mm	4 mm	0439 170	25
175 mm	180 mm	184.5 mm	13.5 mm	12.7 mm	4 mm	0439 175	25
180 mm	185 mm	189.5 mm	14.2 mm	13.2 mm	4 mm	0439 180	25
185 mm	190 mm	194.5 mm	14.2 mm	13.7 mm	4 mm	0439 185	25
190 mm	195 mm	199.5 mm	14.2 mm	13.8 mm	4 mm	0439 190	25
195 mm	200 mm	204.5 mm	14.2 mm	13.8 mm	4 mm	0439 195	25
200 mm	205 mm	209.5 mm	14.2 mm	14 mm	4 mm	0439 200	25
205 mm	211 mm	217 mm	14.2 mm	14 mm	5 mm	0439 205	25
210 mm	216 mm	222 mm	14.2 mm	14 mm	5 mm	0439 210	25
215 mm	221 mm	227 mm	14.2 mm	14 mm	5 mm	0439 215	25
220 mm	226 mm	232 mm	14.2 mm	14 mm	3 mm	0439 220 3	10
220 mm	226 mm	232 mm	14.2 mm	14 mm	5 mm	0439 220	25
225 mm	231 mm	237 mm	14.2 mm	14 mm	5 mm	0439 225	20
230 mm	236 mm	242 mm	14.2 mm	14 mm	5 mm	0439 230	10
235 mm	241 mm	247 mm	14.2 mm	14 mm	5 mm	0439 235	25
240 mm	246 mm	252 mm	14.2 mm	14 mm	5 mm	0439 240	25

Suitable for holes	Suitable for groove diameter	Outer diameter (d ₁)	Eye width (a ₁)	Width (b ₁)	Thickness (s ₁)	Art. no.	P. Qty.
245 mm	251 mm	257 mm	14.2 mm	14 mm	5 mm	0439 245	25
250 mm	256 mm	262 mm	14.2 mm	14 mm	5 mm	0439 250	25
255 mm	263 mm	270 mm	16.2 mm	16 mm	5 mm	0439 255	25
260 mm	268 mm	275 mm	16.2 mm	16 mm	5 mm	0439 260	25
265 mm	273 mm	280 mm	16.2 mm	16 mm	5 mm	0439 265	25
270 mm	278 mm	285 mm	16.2 mm	16 mm	5 mm	0439 270	10
275 mm	283 mm	290 mm	16.2 mm	16 mm	5 mm	0439 275	10
280 mm	288 mm	295 mm	16.2 mm	16 mm	5 mm	0439 280	25
285 mm	293 mm	300 mm	16.2 mm	16 mm	5 mm	0439 285	25
290 mm	298 mm	305 mm	16.2 mm	16 mm	5 mm	0439 290	20
295 mm	303 mm	310 mm	16.2 mm	16 mm	5 mm	0439 295	25
300 mm	308 mm	315 mm	16.2 mm	16 mm	5 mm	0439 300	25
305 mm	315 mm	322 mm	20.2 mm	20 mm	6 mm	0439 305	1
310 mm	320 mm	327 mm	20.2 mm	20 mm	6 mm	0439 310	1
315 mm	325 mm	332 mm	20.2 mm	20 mm	6 mm	0439 315	1
320 mm	330 mm	337 mm	20.2 mm	20 mm	6 mm	0439 320	1
330 mm	340 mm	347 mm	20.2 mm	20 mm	6 mm	0439 330	1
335 mm	345 mm	352 mm	20.2 mm	20 mm	6 mm	0439 335	1
340 mm	350 mm	357 mm		20 mm	6 mm	0439 340	10
350 mm	360 mm	367 mm	20.2 mm	20 mm	6 mm	0439 350	1
360 mm	370 mm	377 mm	20.2 mm	20 mm	6 mm	0439 360	1
370 mm	380 mm	387 mm	20.2 mm	20 mm	6 mm	0439 370	1
380 mm	390 mm	397 mm	20.2 mm	20 mm	6 mm	0439 380	1
390 mm	400 mm	407 mm	20.2 mm	20 mm	6 mm	0439 390	1
400 mm	410 mm	417 mm	20.2 mm	20 mm	6 mm	0439 400	1
410 mm	422 mm	430 mm	26.2 mm	26 mm	6 mm	0439 410	1
420 mm	432 mm	440 mm	26.2 mm	26 mm	6 mm	0439 420	1
430 mm	442 mm	450 mm	26.2 mm	26 mm	6 mm	0439 430	1
440 mm	452 mm	460 mm	26.2 mm	26 mm	6 mm	0439 440	1
450 mm	462 mm	470 mm	26.2 mm	26 mm	6 mm	0439 450	1
460 mm	472 mm	480 mm	26.2 mm	26 mm	6 mm	0439 460	1
470 mm	482 mm	490 mm	26.2 mm	26 mm	7 mm	0439 470	1
480 mm	492 mm	500 mm	26.2 mm	26 mm	7 mm	0439 480	1
490 mm	502 mm	510 mm	26.2 mm	26 mm	7 mm	0439 490	1
500 mm	512 mm	520 mm	26.2 mm	26 mm	7 mm	0439 500	1
520 mm	534 mm	545 mm	26.2 mm	26 mm	7 mm	0439 520	5
540 mm	554 mm	565 mm	26.2 mm	26 mm	7 mm	0439 540	1
580 mm	594 mm	605 mm	26.2 mm	26 mm	7 mm	0439 580	1

Can be stored in ORSY® system

Instructions

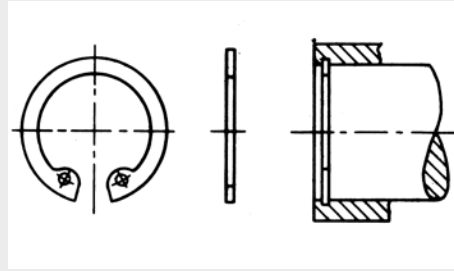

Related products

Circlips for bores assortment

Art. no.

5964 043 900